


TB-3982 -- TB-3995

*Ilustración unidad

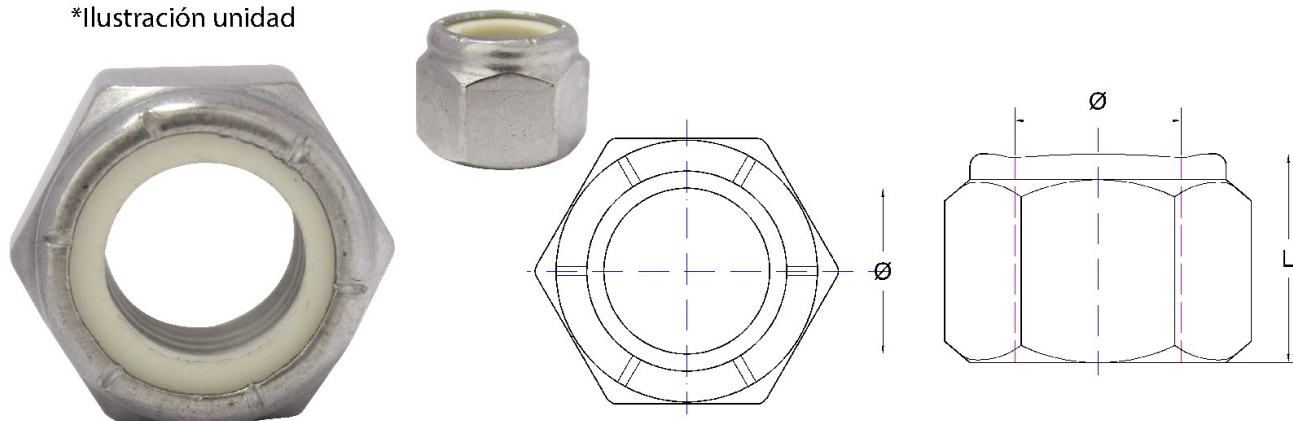

DESCRIPCIÓN

Tuerca de seguridad con inserto de nylon que se moldea una vez que se inserta el tornillo para asegurarlo en su lugar. Ideal para exteriores y trabajos en ambientes húmedos.

ESPECIFICACIONES TÉCNICAS

CÓDIGO	Ø	L	HILOS POR PULG.	
TB-3996	3/16"	5/16"	24	7/16"
TB-3996A	1/4"	5/16"	20	7/16"
TB-3997	5/16"	3/8"	18	1/2"
TB-3998	3/8"	7/16"	16	9/16"
TB-3998A	7/16"	7/16"	14	5/8"
TB-3999	1/2"	5/8"	13	3/4"
TB-4000	5/8"	3/4"	11	15/16"
TB-4001	3/4"	7/8"	10	1 1/8"
TB-4002	7/8"	1"	9	1 5/16"
TB-4003	1"	1 1/16"	8	1 1/2"

CARACTERÍSTICAS

MATERIAL	 ACERO INOX.
GRADO	 304